


Catenary Kit

Designed specifically for spanning installations and bracing applications


- Light duty 3 mm version is ideal for suspending lightweight electrical services, ductwork and signage
- Heavy duty 6 mm version is perfect for suspending M&E or HVAC services, or where a long catenary is required
- Supplied as a ready-to-use kits, incl. galvanised wire rope
- Cut to bespoke lengths, hex locking key plus release key
- Fast installation, reducing time spent working at height
- Quarter turn secondary locking mechanism in the Gripple fastener prevents dynamic movements



Installation & Adjustment

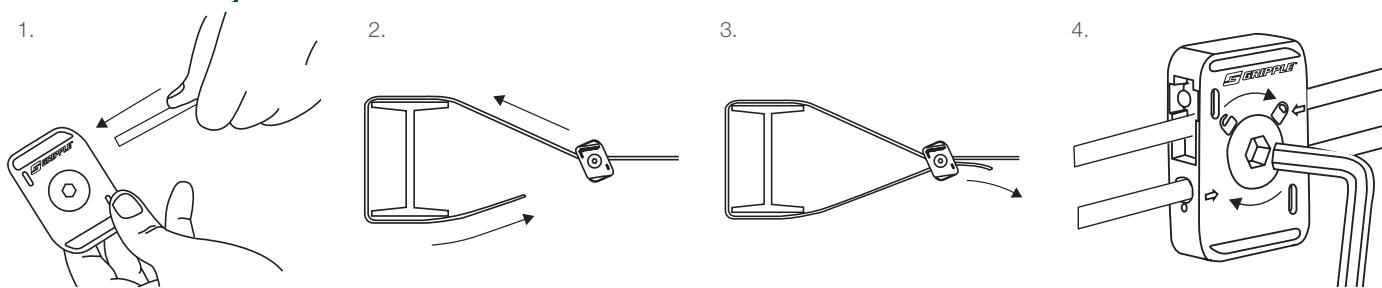

Specifications

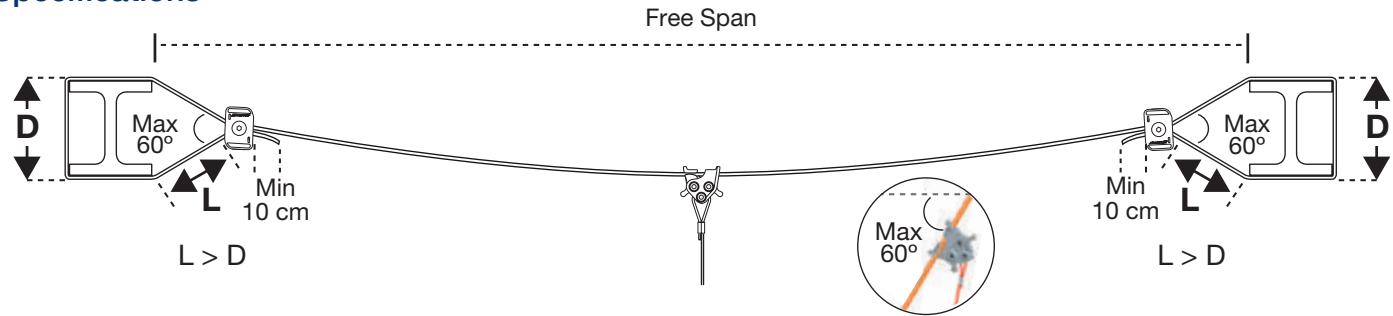

Submittal Information

Material: Ceramic rollers and stainless springs for optimum corrosion resistance

Load Rating:

- Light duty 3 mm version
Up to 30 kg vertical load per free span
Connection type: 3 mm C-Clip
Not suitable for use with any Tensioning Tool
- Heavy duty 6 mm version
Up to 100 kg vertical load per free span
Connection type: 6 mm C Clip
Can be used with the Heavy Duty Tensioning Tool

Installation Recommendations

Wire Rope Specifications:

- D3 - Galvanised 7 x 7, 3 mm or 1/8" steel wire rope
- D6 - Galvanised 7 x 19, 6 mm or 1/4" steel wire rope

Accessories

