


90° Eyelet

For attachment to a variety of substrates using suitable fixings.


- Ideal for use with Gripalle concrete screws for direct soffit mounting
- Available up to 90kg SWL, with a 5:1 safety factor
- Comes as a ready-to-use kit with wire rope and Gripalle fastener
- Available in lengths from 1 m to 10 m
- Fire rated version available



Installation

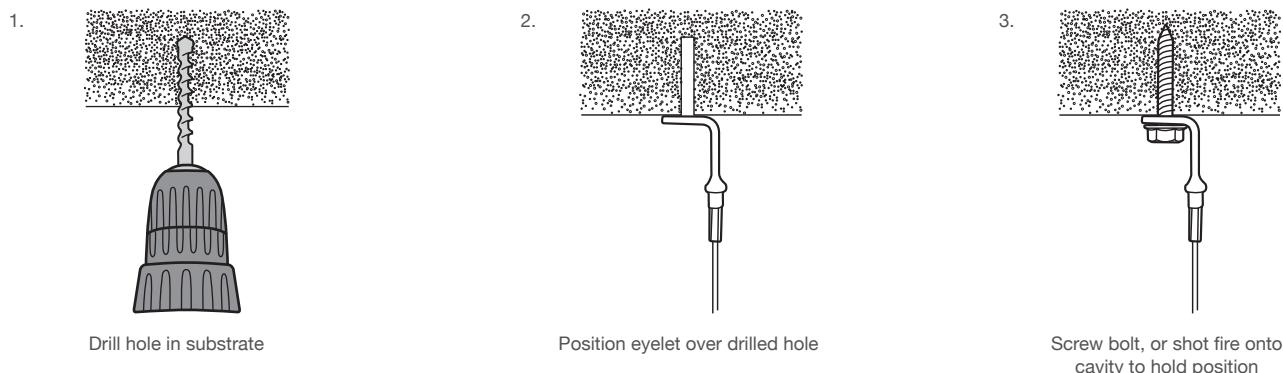

Specifications

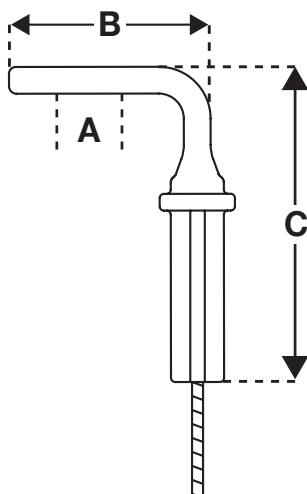

Submittal Information

Safe Working Load:
Refer to hanger load ratings and safe working loads.

Material:
Steel Finish: Bright zinc plated

Approvals:
Lloyds certified

Standard Hanger Options



Standard Hangers



Express



Angel Male



Duct Trapeze

For more options on available hangers please contact us or visit gripple.co.nz

Important Recommendations

1. Construction materials and conditions vary on different sites. If it is suspected that the base material has insufficient strength to achieve a suitable fixing, contact Gripalle Ltd. The responsibility for judgment of base material strength lies with the installer, and not with Gripalle Australia.
2. Not to be used in marine, coastal or corrosive environments.
3. The information and recommendations given herein are believed to be correct at time of writing. The data has been obtained from tests done under laboratory, or other controlled conditions and it is the user's responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
4. Whilst Gripalle Australia can give general guidance and advice, the nature of Gripalle products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
5. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by Gripalle Australia.

Size	A (mm)	B (mm)	C (mm)
No.1	7.5	25	38
No.2	7.5	25	38
No.3	7.5	25	38

