


Standard Hanger Range

Used to suspend a variety of HVAC, mechanical and electrical services from different substrates.

- Ideal for fast suspension of cable containment, pipework, air conditioning.
- Up to six times faster to install than traditional hanging systems
- Versatile and simple to use
- Strong, safe and industry approved
- Aesthetically discreet and lightweight
- Supplied in ready-to-use kits, comprising a length of wire, pre-crimped End Fixing, Gripple Hanger and Setting Key




Installation & Adjustment

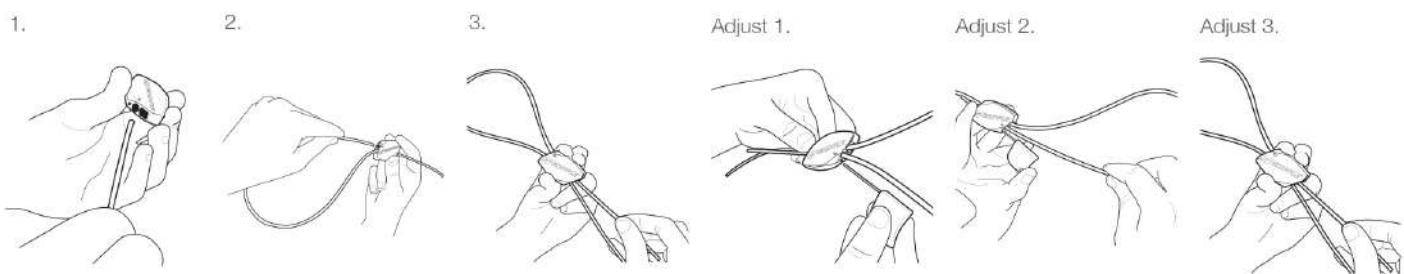

Ensure a minimum 75 mm of tail wire exits the hanger.

Specifications



Submittal Information

Materials:

Housing - Type ZA2 Zinc
Wedge - Sintered steel hardened to min. 56 Rockwell C
Spring - Stainless Steel (Type 302)
End Cap - UV stabilised homopolymer propylene

Standard End Fixings



Loop



M6 & M8 Stud



Snap Hook



Toggle



45 Deg Eyelet



Barrel

For more options on available end fixings please contact us or visit gripple.co.nz

Hanger #	Dimensions			Safe Working Load All with a 5:1 safety factor
	A	B	C	
No. 1	16	24	6	10 kg
No. 2	18	34	43	45 kg
No. 3	26	43	8	90kg
No. 4	37	62	106	325 kg
No. 5	43	106	13	225 kg

