

Product Code: RIK-Q75-W16


DESIGN SPECIFICATIONS

- Designed with lateral seismic loads in mind.
- Small footprint to suit applications where space is limited.
- Accepts 75x75SHS with a 3.0 mm minimum thickness.
- M16 Anchor holes optimally spaced to ensure maximum capacity.
- Fast and simple installation via self drilling screws (TK14-25) or M12 Bolts.


PRODUCT FINISHES



HDG

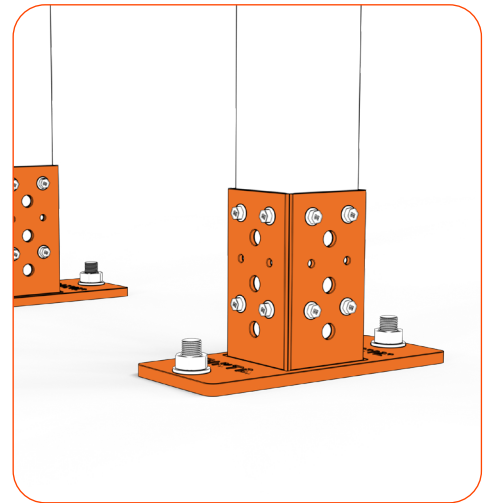


PRODUCT DETAILS

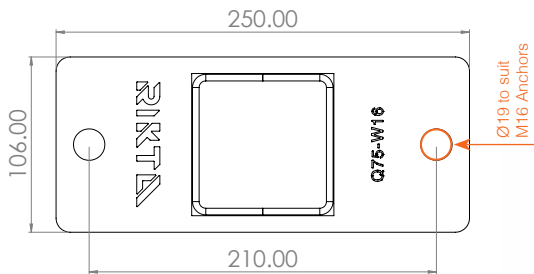


SAFE WORKING LOADS

Direction of Force	Peak Load (kN)
F _x (kN)	6.91
F _y (kN)	48.64
F _z (kN)	6.31

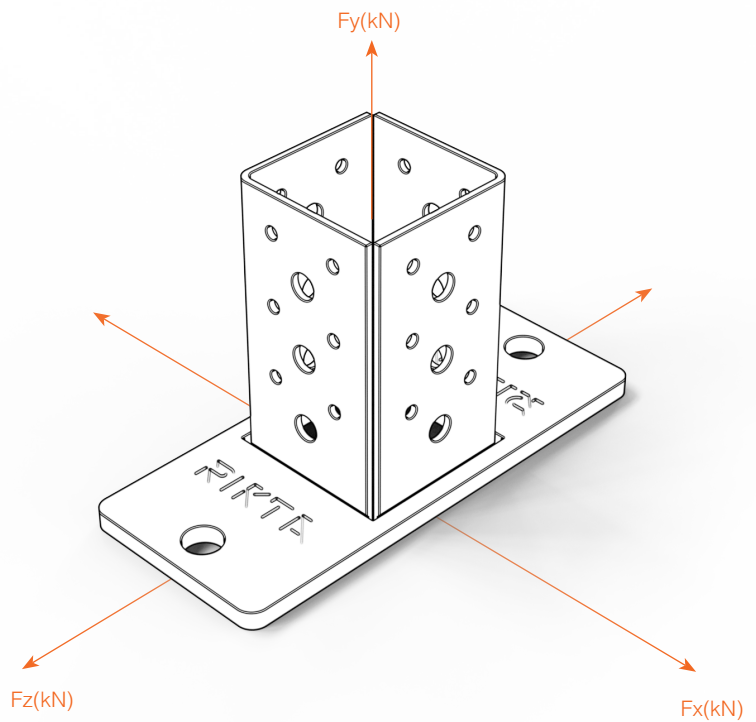

Product Code: RIK-Q75-W16

PRODUCT DETAILS

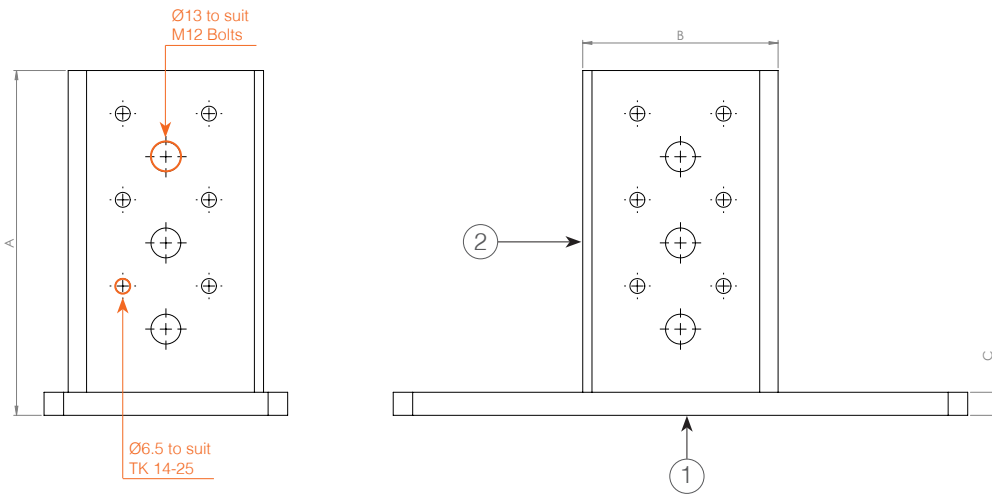

Dimensions (mm)	
A	150
B	85
C	10
Materials	
①	AS G350 Mild Steel
②	AS G250 Mild Steel

FASTENERS & ACCESSORIES

RIK-Q75 Joiners



Q75-J22



Q75-J22L



Q75-J12



Q75-J12L



Q75-J13

FASTENERS



UC FBS II M10



FAZ II M10 & M12



TEK Screw 14g x 25mm



M12 Bolt & Nut